# Source Four LED CYC

## **Profile Spotlight Series**



### SPECIFICATIONS

The Source Four LED CYC adapter brings the infinite color options of the x7 Color System to your cyc. Using ETC's innovative design, you can quickly turn your Source Four LED or ColorSource Spot into a bright, colorful and versatile cyclorama wash light. With its simple setup, you can easily achieve beautiful cyc-light distribution from the same Source Four LED or ColorSource Spot light engine you already have.

#### PHYSICAL

- Rugged, die-cast, aluminum construction
- Fits all standard Source Four LED or ColorSource Spot light engines
- \*Not for use with HPL Source Four fixtures\*
- Compatible with ETL and CE fixtures
- Can be top- and/or bottom-mounted
- Simple, flexible setup

#### OPTICAL

- Bright, even wash light
- Maximum color control with ETC's x7 Color System
- Smooth coverage up to 40 ft (top and bottom lit)
- Efficient 2:1 spacing ratio (maximum) from cyc
- 1.5:1 ideal spacing ratio
- Heat- and impact-resistant polycarbonate lenses

## Type(s) Project Date Notes

#### ORDERING INFORMATION

#### Source Four LED CYC

MODEL	DESCRIPTION	
S4LEDCYC	Source Four LED CYC Adapter	

For a complete fixture, order the Source Four LED or ColorSource Spot fixture body in addition to the CYC adapter.

#### Accessories

MODEL	DESCRIPTION	
S4LEDCYCBD	Source Four LED CYC barn door*	


\*Barn door creates sharp bottom edge and controls glare on top




## Profile Spotlight Series

### PHOTOMETRICS

Suggested elevation angles for different setback distances with a 20-ft high cyclorama

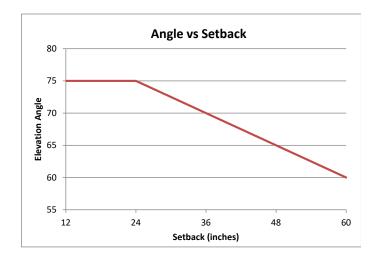





## Lumen output with Source Four LED Lustr+


Mode	Setback Distance	Total Lumens on 24'x21' Cyc	Elevation Angle
Boost	3 ft	2,659	65°
Regulated	3 ft	2,405	65°


# Profile Spotlight Series

#### PHOTOMETRICS

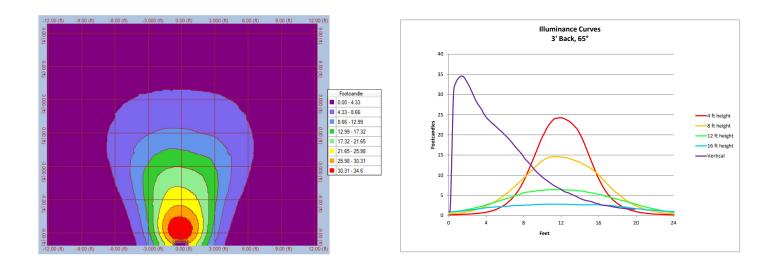

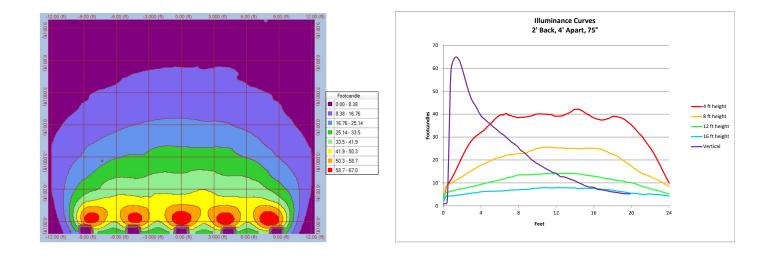

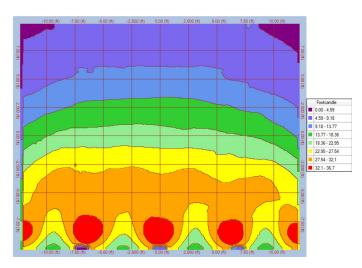

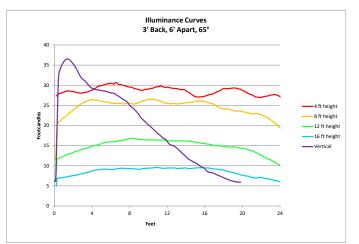

# Source Four LED CYC


## Profile Spotlight Series


### PHYSICAL


#### Source Four LED CYC Weights\*

MODEL	WEIGHT		SHIPPING WEIGHT	
	lb	kg	lb	kg
CYC	4.5	2.1	6.0	2.8

\* CYC adapter only

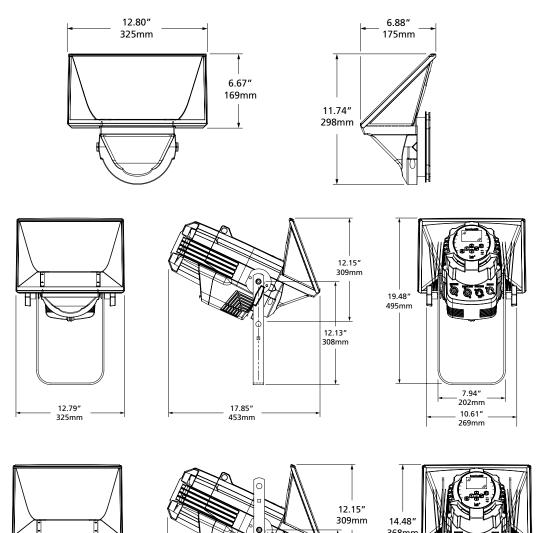







Corporate Headquarters • Middleton, WI USA Global Offices • London, UK • Rome, IT • Holzkirchen, DE • Paris, FR • Hong Kong • Dubai, UAE • Singapore • New York, NY • Orlando, FL • Los Angeles, CA Copyright@2021 ETC. All Rights Reserved. All product information and specifications subject to change. Rev E 2021-01 Trademark and patent info: etcconnect.com/IP

#### etcconnect.com

12.79″

325mm